

FOX BOND™ Zero


Acid Wash for Chloride, Oil and Rust

DESCRIPTION

Polychem® Foxbond Zero is a highly concentrated acidic, soak / immersion cleaner for removing mill oils, grease, buffing compounds, stencil marks, finger prints, stamping oils from steel, stainless steel, steel alloys, aluminum and aluminum alloys and other metal surfaces.

Foxbond Zero cleans and provides a controlled etch on metal surfaces which increases surface area to promote better adhesion of coatings. In addition, **Foxbond Zero** removes surface rust, scale, oxides and heat scale from all metal surfaces.

Foxbond Zero has exceptional cleaning and brightening ability. It is recommended as a pre-paint treatment. **Foxbond Zero** can be used in immersion and ultrasonic tanks, manual wipe on / wipe off applications. All applications must be followed by a water rinse.

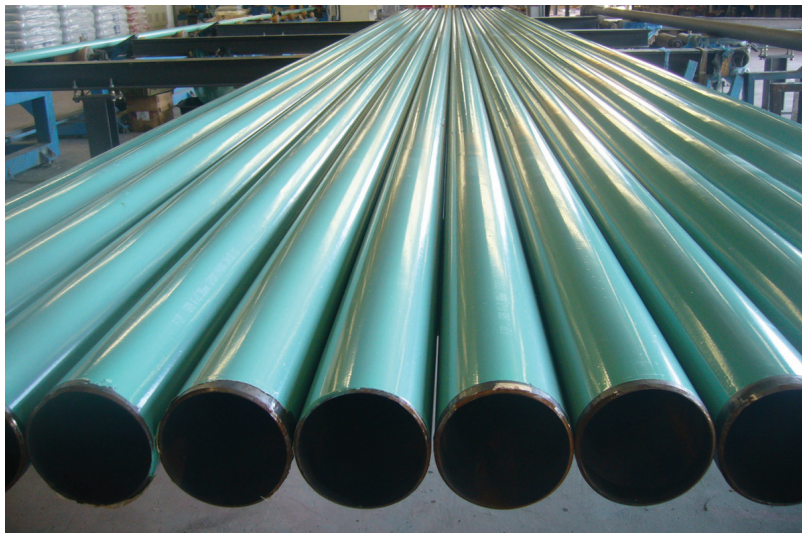

APPLICATION PROCEDURE

Clean the solution tank. Add water to the operating level of the tank. Add sufficient amount of **Foxbond Zero** to make a working solution of 5-50% by volume.

Mix well and use at ambient temperature if needed, or heat the solution, to the operating temperature of 120°-140°F and process cleaning. Higher temperatures up to 160°F (71°C) may be used to speed up the cleaning of steel or stainless steel.

PROPERTIES

Composition	: Blend of surfactants and phosphoric acid
Form	: Clear liquid
Odor	: Bland / mild
Specific Gravity, @ 20°C	: 1.40
Foaming tendency	: Medium
Diluent	: Water
Use concentration	: Normally used at 5-50% by volume (1 part to 1-50 parts with water)
Use temperature	: ambient - 140°F
pH at working concentrations	: 1-2 at 5 % by volume

SAFETY AND HANDLING PRECAUTIONS

Foxbond Zero is an acidic cleaner. Direct contact may be corrosive to eyes and skin. Avoid prolonged contact with skin. Wash thoroughly after handling. Do not take internally.

U. S. POLYCHEMICAL CORPORATION



EXECUTIVE OFFICES PLANT LABORATORY
584 Chestnut Ridge Road Chestnut Ridge, NY 10977
(800) 431-2072 (845) 356-5530 www.uspoly.com